


Realtime PRO 1700



Specifications

User capacity	5000/10000
Face capacity	5000/10000
Storage capacity	10,00000
Recognition way	Face, Card, Password
Language	English
Self-checking function	Yes
Face FAR/ FRR	0.001/0.1(%)
Recognition Speed	0.3s
Face intelligent update function	Yes
Recognition ways	1:1, 1:N
CPU	Quad-core, 1.7G
OS	LINUX
Camera	Dual camera (High resolution infrared and color dual cameras)
IR LED	Yes
LCD	7inch HD Touch Screen
Infrared approach receiver	Yes
Touch screen	Yes
Communication	TCP/IP, USB, U-disk, WIFI
Voice	Yes
Clock RTC	Yes
Working voltage	DC12V - 24V Wide voltage design
Ambient light	0-50000Lux
Working temperature	0°C-40 °C
Working humidity(RH)	20% ~ 80%
Door sensor(EN-MG)	Gate magnetic signal input
Alarm	Alarm output
Exit	Door switch signal input
Wiegand	1 group of WG26/34 input,External reader available,- 1 group of WG26/34 output
Tamper Alarm	Yes

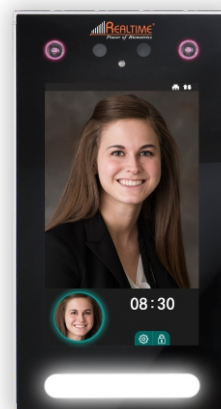